

Communication Systems

Network Layer

Prof. Dr.-Ing. Lars Wolf

TU Braunschweig
 Institut für Betriebssysteme und Rechnerverbund

Mühlenpfordtstraße 23, 38106 Braunschweig, Germany
 Email: wolf@ibr.cs.tu-bs.de

Scope

Complementary Courses: Multimedia Systems, Distributed Systems, Mobile Communications, Security, Web, Mobile+UbiComp, QoS										
Applications										
L5	Application Layer (Anwendung)	Transitions & Addressing	P2P	Email	Files	Telnet	Web	IP-Tel: Signal. H.323 SIP	Media Data Flow RT(C)P	Security
L4	Transport Layer (Transport)		Internet: TCP, UDP				Mobile IP	Mobile Communications MM COM - QoS specific	Transport	
L3	Network Layer (Vermittlung)		Internet: IP						Network	
L2	Data Link Layer (Sicherung)		LAN, MAN High-Speed LAN, WAN							
L1	Physical Layer (Bitübertragung)	Other Lectures of "ET/IT" & Computer Science								
Introduction										


Overview

1. Functions of the Network Layer
2. Switching Approaches
3. Services
4. Routing
 - Non-adaptive Procedures
 - Adaptive Procedures
 - Extensions
5. Broadcast Routing
6. Multicast Routing
7. Congestion Control
8. Addressing

1. Functions of the Network Layer

Data transfer from end system to end system


- several hops
- (heterogeneous) subnetworks
- compensate for differences between end systems during transmission

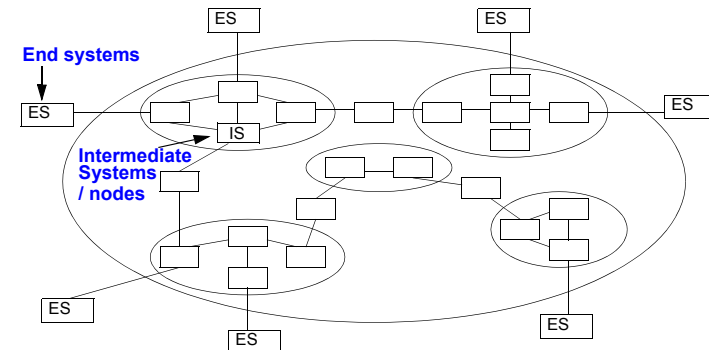

Relevance of the interface: switching vs. transport service

- L1 up to + incl. L3: organization: carrier
- from L4 onward: user/customer/company/institute

Functions of the Network Layer (2)

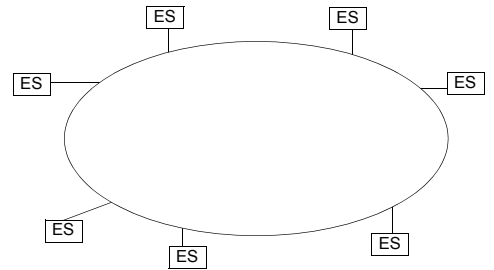

The provided services are

- standardized for end systems
- independent from network technology
- independent from number, type and topology of the subnetworks

Subnetworks (IS 7498):

A multiple of one or several intermediary systems that provide switching functionalities and through which open end systems can establish network connections

Functions of the Network Layer (3)

Primary tasks

- virtual circuits or datagram transmissions
- routing
- congestion control
- Internetworking: provide transitions between networks
- addressing
- Quality of Service (QoS)

Secondary tasks, based on type service and request:

- multiplexing of network connections
- fragmentation and reassembling
- error detection and correction
- flow control as a means to handle congestion
- maintaining the transmission sequence

Functions of the Network Layer (4)

Required knowledge

- subnetwork topology
- address / localization of the end system
- network status (utilization,...)
- packet / data stream communication requirements (Quality of Service)


Examples

- X.25 (ISDN, ...)
- Internet protocol IP (TCP/IP,..)

Nomenclature:

Layer	Data Entity
Transport	...
Network	Packet
Data Link	Frame
Physical	Bit/Byte (bit stream)

2. Switching Approaches

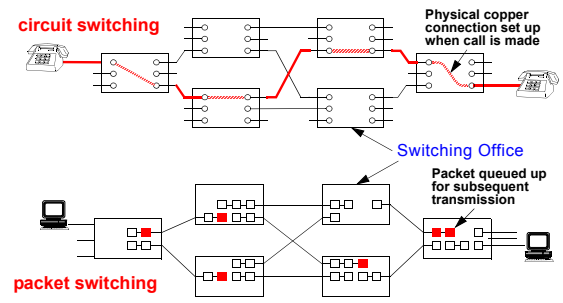

Circuit switching

- switching a physical connection

Message switching

- message is stored and passed on by one hop

Packet switching

- store-and-forward, but transmission packets limited in size

Switching by virtual circuit

- packets (or cells) over a pre-defined path

Circuit Switching

Principle:

- **dedicated path from source to destination for entire duration of a call**
 - connections between switching centers (frequency spectrum, dedicated ports)

Implementation examples:

- **historically: on switching boards**
- **mechanical positioning of the dialers**
- **setting coupling points in circuits**
- **early alternative of B-ISDN: STM (Synchronous Transfer Mode)**

Properties:

- **connection has to be setup before transmission**
 - establishing a connection takes time
- **fixed allocation of bandwidth** ⇒ **no congestion during transfer**
- **constant delay**
 - No processing of data at intermediate nodes ⇒ short delay
- **information delivery is sequenced (by nature)**
- **resource allocation too rigid (possibly wastage)**
 - No support for transmission of bursty data ⇒ potential resource underutilization
- **once connection is established it cannot be blocked anymore**

Message Switching

Principle:

- **all data to be sent is treated as a "message"**
- **"store and forward" network: in each node the message is**
 1. accepted,
 2. checked for errors,
 3. stored and
 4. forwarded (as a whole to the next node)

Example:

- **first telegram service**

Properties:

- **high memory requirements at each node (switching centers)**
 - because message may be of any size
 - usually stored on secondary repository (harddisk)
- **node may be used completely (whole capacity) over a long period of time by one message**
 - i.e., better if packets are of limited size (packet switching)

Packet Switching

Principle:

- **packets of limited size**
- **dynamic determination of route for every packet**
- **no dedicated path from source to destination**

Properties:

- **no connect phase**
- **dynamic allocation of bandwidth**
 - suitable for bursty traffic
 - flexible, provides for resource sharing and good utilization
- **congestion possible**
- **bandwidth reservation difficult, QoS provisioning limited**
- **variable end-to-end delay**
 - due to queuing at intermediate nodes (and varying routes)
- **information delivery may not be sequenced or reliable**

Example:

- **Internet**

Virtual Circuit Switching

Principle:

- **setup path from source to destination for entire duration of call**
- **using state information in nodes but no physical connection**
- **connection setup: defines data path**
- **messages: as in packet switching**
 - follow all **ONE** path
 - but (may) have only the address of the network entry point
 - not the destination address, e.g., ATM: VPI/VCI

Examples:


- **ATM PVC (permanent virtual circuit)**
 - established "manually" (similar to dedicated lines)
- **ATM SVC (switched virtual circuit)**
 - signaling: connect and disconnect corresponding to the telephone network
- **Internet Integrated Services**
 - state established via signaling protocol (RSVP)
 - full addresses are used

Properties

- **all messages of a connection are routed over the same pre-defined data path, i.e., sequence is maintained**
- **it is easier to ensure Quality of Service (see also ATM)**

Comparison: Temporal Performance

Timing of events:

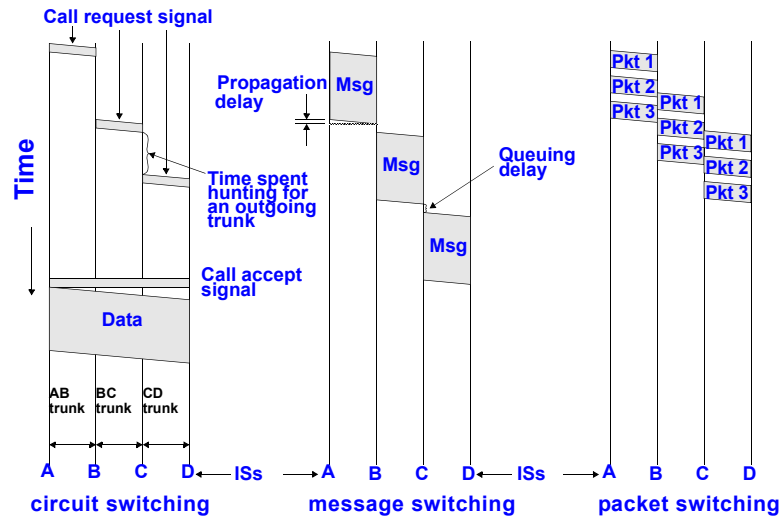

Comparison: Circuit and Packet Switching

Circuit switching:

- connection establishment can take a long time
- bandwidth is reserved
 - no danger of congestion
 - possibly poor bandwidth utilization (bursty traffic)
- continuous transmission time, because all data is transmitted over the same path
- price calculation:
 - duration of connection

Packet switching:

- connect phase not (absolutely) necessary
- dynamic allocation of bandwidth
 - danger of congestion
 - optimized bandwidth utilization
- varying transmission time:
 - because packets of a connection may use different paths
 - not suitable for isochronous data streams
- price calculation:
 - transfer volume

Switching Approaches: Applicability

Circuit switching:

- telephone system
- until now minor usage for computer networks, but various multimedia applications require isochronous data streams

Packet switching:

- used frequently for computer networks
- difficult for voice transmissions but with dominance of Internet (and VoIP) getting importance also here

Message switching:

- seldomly used for computer systems
 - complex storage management (secondary storage)
 - blockage because of large messages

Virtual circuit switching:

- important for QoS provisioning (perhaps in modified manner)
- integrated services
- voice transmission

3. Services

Concepts

- Connection-oriented vs. connectionless communication


Connection-oriented

- goal: error free communication channel
- usually error control: L3 (or network)
 - flow control, ...
- duplex communication
- has advantages for realtime communications
- typical approach from telephone and telecommunication companies:
 - X.25, ATM

Connectionless

- unreliable communication
- hardly any error control: left to L4 or higher layers
 - sequence not ensured, ...
- simplex communication
- more favourable for simple data communication:
 - SEND-PACKET, RECEIVE-PACKET
- Internet community: IP

Connection-Oriented Communication

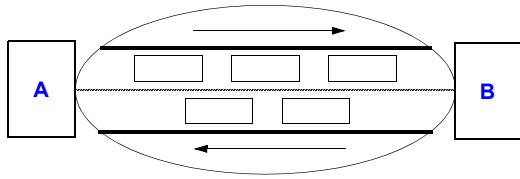


Properties:

- **3-phase interaction**
 - connect
 - data transfer
 - disconnect
- (allows for) **QUALITY OF SERVICE NEGOTIATION** (e.g., throughput, error probability, delay)
- (typically) **RELIABLE COMMUNICATION** in both directions
 - no loss, no duplicates, no modification
 - ensures maintenance of the correct sequence of transmitted data
- **FLOW CONTROL**
- **relatively complex protocols**

Example:

- **telephone service**

Connectionless Communication

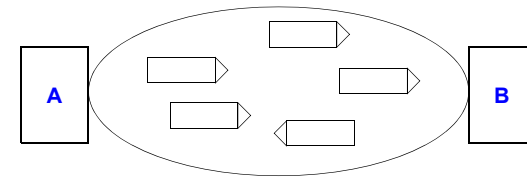

Properties:

- **network transmits packets as ISOLATED UNITS (datagram)**
- **UNRELIABLE COMMUNICATION:**
 - loss, duplication, modification, sequence errors possible
- **no flow control**
- **comparatively SIMPLE PROTOCOLS**

Example:

- **mail delivery service**

Comparison of Concepts

Arguments pro connection-oriented service:

- **simple, powerful paradigm**
- **allows for simplification of the upper layers (L4 - L7)**
- **simplifies task of end systems**
- **for some applications efficiency in time is more important than error-free transmission**
 - (e.g. realtime applications, digital voice transmission)
- **suitable for a wide range of applications**

Arguments pro connectionless service:

- **high flexibility and low complexity**
- **avoids high costs for connects and disconnects for transaction-oriented applications**
- **easier to optimize the network load**
- **compatibility and costs: IP common**
- **"END-TO-END ARGUMENTS"** (Saltzer et al.):
 - reliable communication requires error control within the application
 - and: error control in one layer can replace the error control in the layer underneath it

3.1 Layer 3 Services and their Implementations

ISO IS 8348 Network Service Definition

2 Service classes:

- **Connection-Oriented Network Service (CONS)**
- **Connection-Less Network Service (CLNS)**

Implementations:


- **virtual circuit**
- **datagram**

Comment: service not equal to implementation!


Examples for communication architectures:

		Service (upper layer/s)	
		connectionless	connection-oriented
L3 Implementation	Datagram	typically: UDP via IP	TCP via IP
	virtual circuit	UDP/IP via ATM	typically: ATM AAL1 via ATM

Service ISO CONS: Model

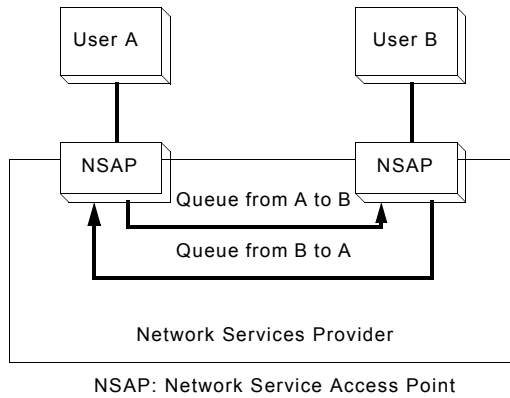

Service ISO CLNS: Model

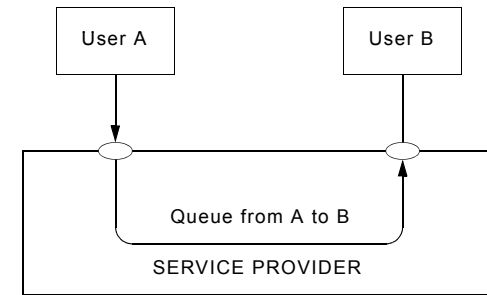

Service provider can

- delete objects in a queue
- duplicate objects in a queue and
- change the object sequence within a queue

Virtual Circuit

Connect phase:

- select a path
- Intermediate systems (IS) store path information
- network reserves all resources required for the connection

Data transfer phase: all packets follow the selected path

- packet contains VC_number (identification of connection, no complete address information)
- IS uses the stored path information to determine the successor

Disconnect phase:


- network forgets the path
- releases reserved resources

Virtual Circuit

(2)

End systems ES allocate VC-identifiers (VC-numbers) independently

Problem: the same VC-identifiers may be allocated to different paths

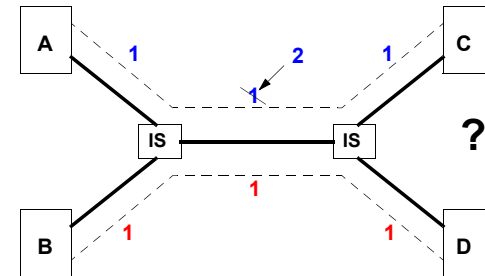


Solution: allocate VC-numbers for virtual circuit segments

- IS differentiates between incoming and outgoing VC-number
1. IS receives incoming VC-number in CONNECT.ind
 2. IS creates outgoing VC-number (unique between IS and successor(IS))
 3. IS sends outgoing VC-number in CONNECT.req

Virtual Circuit

(3)

Example:

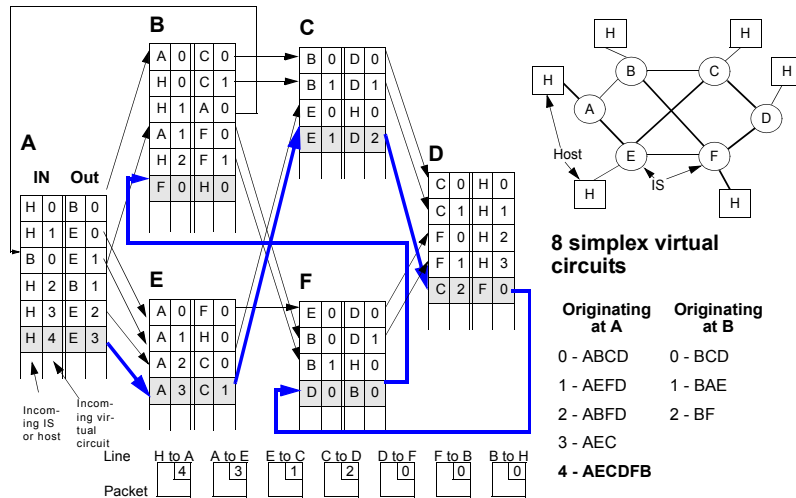

Datagram

Every datagram passes through the network as an isolated unit

- has complete source and destination addresses
- individual route selection for each datagram
- generally no resource reservation
- correct sequence not guaranteed

Datagram vs. Virtual Circuit: Some Comparison

virtual circuit: destination address defined by connection

- + packets contain short VC-number only
- + low overhead during transfer phase
- + "perfect" channel throughout the net
- + resource reservation: "Quality of Service" guarantees possible

but:

- overhead for connection setup
- memory for VC tables and state information needed in every IS
- sensible to IS and link failures
- resource reservation: potentially poor utilization

Datagram: IS routing table specifies possible path(s)

- + no connection setup delay
- + less sensible to IS and link failures
- + route selection for each datagram: quick reaction to failures

but:

- each packet contains the full destination and source address
- route selection for each datagram: overhead
- QoS guarantees hardly possible

4. Routing

Task:

- define the route of packets through the network from the source to the destination system

ROUTING ALGORITHM:

- define on which outgoing line an incoming packet will be transmitted on


Route determination:

- **datagram:**
 - individual decision for each packet
- **virtual circuit:**
 - routing only during connect (session routing)

Routing & Forwarding

Distinction can be made

- **Routing**: make decision which route to use
- **Forwarding**: what happens when a packet arrives

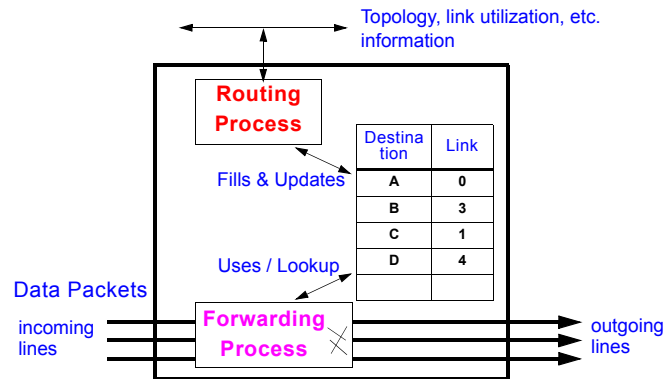

Desirable Properties of a Routing Algorithm

correctness

simplicity

robustness

- compensation for IS and link failures
- handling of topology and traffic changes

stability

- consistent results
- no volatile adaptations to new conditions

fairness

- among different sources compared to each other

optimality

Routing Algorithms: Conflicting Properties


Often conflicting: fairness and optimization

Example:

- Communication among A → A', B → B', C → C' uses full capacity of horizontal line

- optimized throughput, but
- no fairness for X and X'

⇒ tradeoff between fairness and optimization

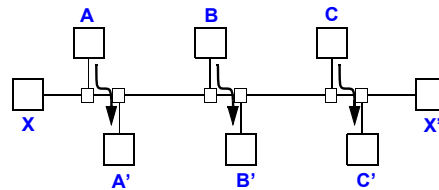

some different optimization criteria

- average packet delay
- total throughput
- individual delay

⇒ conflict

therefore often

- hop minimization per packet
 - it tends to reduce delays and decreases required bandwidth
 - also tends to increase throughput

Classes of Routing Algorithms

NON-ADAPTIVE ALGORITHMS

- current network state not taken into consideration
 - assume average values
 - all routes are defined off-line before the network is put into operation
 - no change during operation (static routing)
- WITH knowledge of the overall topology
 - spanning tree
 - flow-based routing
- WITHOUT knowledge of the overall topology
 - flooding

ADAPTIVE ALGORITHMS

- decisions are based on current network state
 - measurements / estimates of the topology and the traffic volume
- further sub-classification into
 - centralized algorithms
 - isolated algorithms
 - distributed algorithms

Enhancements (adaptive and non-adaptive algorithms)

- multiple routing and hierarchical routing definition


Optimality Principle and Sink Tree

General statement about optimal routes:

*if router J is on optimal path from router I to router K
then the optimal path from router J to router K uses the same route*

Example:



- r1: route from I to J
- r2: route from J to K
- if better route r2' from J to K would exist then concatenation of r1 and r2' would improve route from I to K (contradiction)



⇒ set of optimal routes from all sources to a given destination form a tree rooted at the destination: **SINK TREE**

Sink Tree

Example:



Comments:

- tree: no loops
 - each packet reaches its destination within finite and bounded number of hops
- not necessarily unique
 - other trees with same path lengths may exist

Goal of all routing algorithms

- discover and use the sink trees for all routers

Further comments:

- information about network topology necessary for sink tree computation
 - yet, sink tree provides benchmark for comparison of routing algorithms

Methodology & Metrics

Networks represented as graphs:

- node represents a router
- arc represents a communication line (link)

Compute the **SHORTEST PATH** between a given pair of routers

Different metrics for path lengths can be used

- can lead to different results
- sometimes even combined (but this leads to computational problems)


Metrics for the "ideal" route, e.g., a "short" route

- number of hops
- geographical distance
- bandwidth
- average data volume
- cost of communication
- delay in queues
- ...

4.1 Shortest Path Routing

Example:

- link is labeled with distance / weight
- node is labeled with distance from source node along best known path (in parentheses)

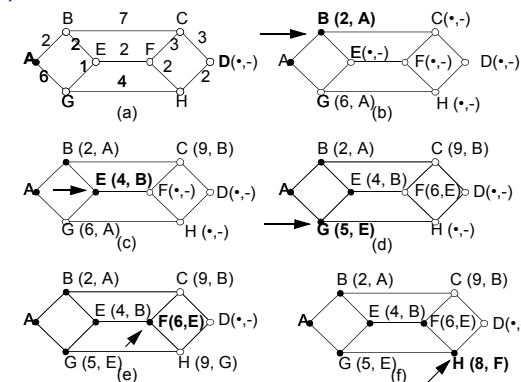

Shortest Path Routing (2)

(2)

Procedure: e.g., according to Dijkstra

find the shortest path from A to D:

- labels may be permanent or tentative
- initially, no paths are known → all nodes are labeled with infinity (tentative)
- discovery that a label represents shortest possible path from source to node: → label is made permanent


1. Node A labeled as permanent (filled-in circle)
2. relabel all directly adjacent nodes with the distance to A (path length, nodes adjacent to source):
 - e.g. B(2,A) and G(6,A)
3. examine all tentatively labeled nodes; make the node with the smallest label permanent
 - e.g. B(2,A)
4. this node will be the new working node for the iterative procedure (i.e., continue with step 2.)

Shortest Path Routing (worksheet 1)

(3)

Example:

- link is labeled with distance
- node is labeled with distance from source along best known path



Procedure: e.g., according to Dijkstra

find the shortest path from A to D:


1. Node A labeled as permanent (filled-in circle)
2. relabel all directly adjacent nodes with the distance to A (path length, nodes adjacent to source):
 - e.g. B(2,A) and G(6,A)

Shortest Path Routing (worksheet 2)

(4)

Example:

- link is labeled with distance
- node is labeled with distance from source along best known path



Procedure: e.g., according to Dijkstra

find the shortest path from A to D:

...


3. examine all tentatively labeled nodes; make the node with the smallest label permanent
 - e.g. B(2,A)
4. this node will be the new working node for the iterative procedure (i.e., continue with step 2.)

Shortest Path Routing (worksheet 3)

(5)

Example:

- link is labeled with distance
- node is labeled with distance from source along best known path

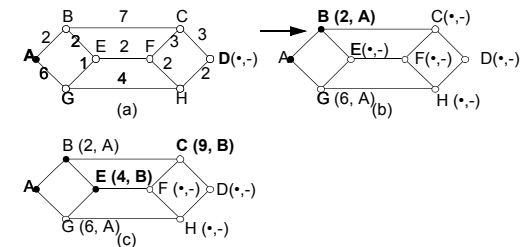

Procedure: e.g., according to Dijkstra


find the shortest path from A to D:

1. Node B has been labeled as permanent (filled-in circle)
2. relabel all directly adjacent nodes with the distance to B (path length, nodes adjacent to source):
 - A (does not apply, because it is the origin),
 - i.e. E (4,B), C (9,B)

Shortest Path Routing (worksheet 4) (6)

Example:

- link is labeled with distance
- node is labeled with distance from source along best known path

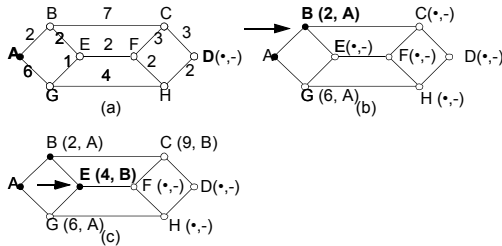

Procedure: e.g., according to Dijkstra

find the shortest path from A to D:

-
-
- examine all tentatively labeled nodes; make the node with the smallest label permanent: e.g. E(4,B)
- this node will be the new working node for the iterative procedure ...

4.2 Flow-Based Routing

Usage

- topology
- average utilization and available capacity per edge/sub-path
 - sometimes useful to choose a route that is longer but available

Procedure

- Given: assumption for a path's average load over a pre-selected path
 - computation of the **AVERAGE DELAY PER EDGE** by means of queuing theory
 - average delay at an edge

$$T_i = \frac{1}{\text{edge capacity} - \text{average edge utilization}} = \frac{1}{\mu C_i - \lambda_i}$$


includes

- serving time (occurs also during no load, $\lambda_i=0$)
 - actual waiting time
- computation of the **TOTAL AVERAGE DELAY OF A SUBNETWORK** by weighted sum of the delays at single edges
 - different overall delays result from selecting different paths;
 - subnetwork with **MINIMAL OVERALL DELAY** used for routing

Flow-Based Routing (2)

Example: requirements

- network with fully duplex channels,
- stating **TOPOLOGIES and CAPACITIES**



Source	Destination					
	A	B	C	D	E	F
A		9	4	1	7	4
B	9		8	3	2	4
C	4	8		3	3	2
D	1	3	3		3	4
E	7	2	3	3		5
F	4	4	2	4	5	

- stating the paths to be selected including the number of packets/sec
 - example from B to D: path BFD with 3 packets/sec
 - MATRIX** pre-defined by a different algorithm
 - overall solution varies depending on the matrix

Flow-Based Routing (3)

Example: initial computation information

i	Line	λ_i (pkts/sec)	C_i (kbps)	μC_i (pkts/sec)	T_i (msec)	Weight
1	AB		20			
2	BC		20			
3	CD		10			
4	AE		20			
5	EF		50			
6	FD		10			
7	BF		20			
8	EC		20			

Example: computation results

i	Line	λ_i (pkts/sec)	C_i (kbps)	μC_i (pkts/sec)	T_i (msec)	Weight
1	AB	14	20	25	91	0.171
2	BC	12	20	25	77	0.146
3	CD	6	10	12.5	154	0.073
4	AE	11	20	25	71	0.134
5	EF	13	50	62.5	20	0.159
6	FD	8	10	12.5	222	0.098
7	BF	10	20	25	67	0.122
8	EC	8	20	25	59	0.098

Flow-Based Routing

(4)

- λ_i **Average load:**
the sum of all median packets/sec at the respective edge
- example: $AB = AB (AB=9) + AC (ABC=4) + AD (ABFD=1) = 14$

C_i **Capacity of each edge in kbps (known from the graph)**

μC_i **Capacity of each edge at given median packet size**

- example: AB, 20 kbit/sec and packets in median 800 bit/packet

$$\mu C_i = \frac{20 \text{ kbit/sec}}{800 \text{ bit/packet}} = 25 \text{ packets/sec}$$

T_i **Average delay on each path**

$$T_i = \frac{1}{\mu C_i - \lambda_i}$$

- example $T_1 = \frac{1}{25 \text{ packets/sec} - 14 \text{ packets/sec}} = 90,909 \dots \text{ msec/packet}$

Flow-Based Routing

(5)

Weight: the relative traffic of data using this path

- (in relation to the overall traffic)
- example

$$\text{Weight (AB)} = \frac{(\text{average load AB})}{\sum_{\text{all paths xy}} \text{average load xy}} = \frac{14}{82} = 0,1707$$

⇒ **Average overall delay for the subnetwork:**

- example

$$\sum_{\text{all path ij}} \text{Weight}(ij) \times \text{average delay (ij)} = 86 \text{ msec}$$

4.3 Flooding

Principle: IS transmits the received packet to all adjacent IS (except over the path it came in)

- but generates "an infinite amount" of packets

Methods to limit packets

- hop counter in the packet header**
 - each IS decrements this hop counter
 - when the hop counter = 0, the packet is discarded
 - initialization for maximum path length (if known); worst case: subnet diameter
- each station remembers the packets that have already been transferred and deletes them upon recurrence**
 - source router inserts sequence number into packets received from hosts
 - each router needs a 'already seen sequence number' list per source router
 - packets with sequence number on list is dropped
 - sequence number list must be prevented from growing without bounds
 - store only upper-counter / highest sequence number(s)

Variation: Selective Flooding

Approach:

- do not send out on every line
- IS transmits received packet to adjacent stations, LOCATED IN THE DIRECTION OF THE DESTINATION
- with 'regular' topologies this makes sense and is an optimization
- but some topologies do not fit well to this approach

Comment:

- geographically-oriented routing got recent interest for mobile scenarios

Flooding: Evaluation and use

- overhead:** not practical in most applications
- extremely robust:** military use
- reaches all IS:** e.g., the exchange of control data between nodes
- initialization phase:** does not need information about the topology
- always finds shortest path:** use as benchmark

Summary: Static Routing Procedures

Static Procedure

- **network operator generates tables**
- **tables**
 - are loaded when IS operation is initiated and
 - will not be changed any more

Characteristics

- + simple
- + good results with relatively consistent topology and traffic
- **but:**
 - poor performance if traffic volume or topologies change over time

4.4 Centralized Adaptive Routing

Principle:

- **in the network: RCC (Routing Control Center)**
- **each IS sends periodically information on the current status to the RCC**
 - list of all available neighbours
 - actual queue lengths
 - line utilization, etc.
- **RCC**
 - collects information
 - calculates the optimum path for each IS pair
 - generates routing tables and distributes these to the ISs

Example: TYMNET

- **packet exchanging network**
- **1000 nodes/IS**
- **virtual circuits**


Centralized Adaptive Routing (2)

Characteristics:

- **RCC has complete information**
- ⇒ **perfect decisions**
- **and IS is free of routing calculations**

but

- **re-calculations quite often necessary (approx. once/min or more often)**
- **low robustness**
- **no correct decisions if network is partitioned**
- **ISs receive tables at different times**
- **traffic concentration in RCC proximity**

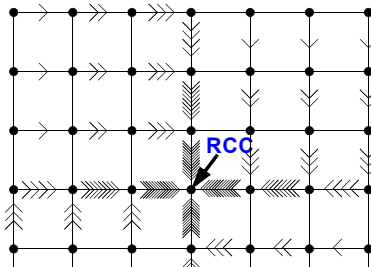

4.5 Isolated Procedures: Backward-Learning Algorithm

Isolated routing

- **every IS makes decision based on locally gathered information only**
 - no exchange of routing information among nodes
 - only limited adaptation possibility to changed traffic / topology

IS "learns" from received packets (..., S, C, ...)

- **S ... source - IS**
- **C ... hop counter**

Packet of source S is received on line L after C hops

⇒ **S is reachable on L within C hops**

Routing table in IS

- **L - table (destination - IS, outgoing line, C_{min})**
- **update of the routing table**

IS receives packet (..., S, C, ...) on L


```

if not (S in L-Table)
then Add(S,L,C)
else if C < Cmin
then Update(S,L,C)
    
```

Isolated Procedures: Backward-Learning Algorithm (2)

Example:

- packet (..., source - IS, hop counter, ...)
 - P_1 (..., A, 4, ...) → Add (A, l_1 , 4)
 - P_2 (..., A, 3, ...) → Update (A, l_2 , 3)



Problem:

- packets use a different route, e.g. because of failures, high load
- algorithm retains only the old value (because it was "better"),
 - i.e., algorithm does not react to deteriorations

Solution:

- periodic deletion of routing tables (new learning period)
- table deletion
 - too often: mainly during the learning phase
 - not often enough: reaction to deteriorations too slow

4.6 Distributed Routing: Distance Vector Routing

DISTANCE VECTOR ROUTING ALGORITHM

- also known as distributed Bellman-Ford algorithm, Ford-Fulkerson algorithm
- was the original ARPANET routing algorithm
- has been used in the Internet as RIP Routing Information Protocol

Principle:

- IS maintains table (i.e., vector) stating
 - best known distance to destinations
 - and line to be used
- ISs update tables by exchanging routing information with their neighbours

Distance Vector Routing: Procedure

- Each IS maintains routing table with one entry per router in the subnet
 - estimate of the distance (hops, delay, packets queued, ...) to destination
 - outgoing line to be used for that destination

Each IS is assumed to know the "distance(s)" to each neighbour

- number of hops (= 1)
- delay (echo packets)
- queue length (e.g., used in the ARPANET),...

IS sends lists with estimated distances to each destination periodically to its neighbours Y

- e.g., Internet RIP every 30 sec, maximum distance 15 hops

X receives list E(Z) from neighbour Y


- distance X to Y: e
- distance Y to Z: E(Z)
- i.e. distance X to Z (via Y): E(Z) + e

IS calculates a new routing table from the received lists, containing

- destination IS, preferred outgoing path, "distance"

Distance Vector Routing: Exampe

Subnet



delays at and of nodes A/I/H/K/. (row).
to nodes A;B;C;D... (column)


To	A	I	H	K	new estimated delay from J	line		
A	0	24	20	21			8	A
B	12	36	31	28	20	A		
C	25	18	19	36	28	I		
D	40	27	8	24	20	H		
E	14	7	30	22	17	I		
F	23	20	19	40	30	I		
G	18	31	6	31	18	H		
H	17	20	0	19	12	H		
I	21	0	14	22	10	I		
J	9	11	7	10	0	-		
K	24	22	22	0	6	K		
L	29	33	9	9	15	K		
JA Delay=	8	JI Delay=	10	JH Delay=	12	JK Delay=	6	new routing table for J

Previous routing table will not be taken into consideration

⇒ Reaction to deteriorations

Distributed Routing: Distance Vector Routing (3)


Example: defining a section



B.sends information to node J

A	I	H	K
12	36	31	28
JA delay = 8	JI delay = 10	JH delay = 12	JK delay = 6

from B via A: costs (JA) + costs path (AB) = 8 + 12 = 20
 from B via I: costs (JI) + costs path (IB) = 10 + 36 = 46
 from B via H: costs (JH) + costs path (HB) = 12 + 31 = 43
 from B via K: costs (JK) + costs path (KB) = 6 + 28 = 34



Distance Vector Routing: Feature "Count to Infinity"


- Information distribution over new
- short paths (with few hops): fast
 - long paths with many hops: SLOW

A	B	C	D	E	
∞	∞	∞	∞	∞	Initially
1	∞	∞	∞	∞	After 1 exchange
1	2	∞	∞	∞	After 2 exchanges
1	2	3	∞	∞	After 3 exchanges
1	2	3	4	∞	After 4 exchanges

Example: route improvement

- previously: A unknown
- later: A connected with distance 1 to B, this will be announced
- Note: Synchronous update used here for simplification
- distribution proportional to topological spread

Example: deterioration, (here: connection destroyed)



- A previously known, but now detached
- the values are derived from (incorrect) connections of distant IS

B: no connection directly to A, but C reports distance CA=2
 i. e. BA = BC + CA = 1 + 2 = 3
 actually wrong!

Comment

- limit "infinite" to a finite value, depending on the metrics
 - example: "infinite = maximum path length + 1"

A	B	C	D	E	
3	2	3	4	∞	Initially
3	4	3	4	∞	After 1 exchange
5	4	5	4	∞	After 2 exchanges
5	6	5	6	∞	After 3 exchanges
7	6	7	6	∞	After 4 exchanges
7	8	7	8	∞	After 5 exchanges
∞	∞	∞	∞	∞	After 6 exchanges

Distance Vector Routing: Variant "Split Horizon Algorithm"

Objective - based on the Distance Vector principle
 • but improve the "count to infinity" property

Principle


- in general, to announce the "distance" to each neighbour
- special case: if neighbour Y exists on the reported route, X reports the response "false" to Y

⇒ distance X (via Y) according to arbitrary i: ∞

Example:

deterioration, e.g., connection destroyed

- B to C: A = ∞ (real),
- C to B: A = ∞ (because A is on path), ...



Note:

still poor, depending on topology, example:

- connection CD is removed
- A receives "false information" via B
- B receives "false information" via A

⇒ slow distribution (just as before)

4.7 Link State Routing

also "distributed routing"

Basic principle

- IS measures the "distance" to the directly adjacent IS, distributes information, calculates the ideal route

Procedure

1. determine the address of adjacent IS
2. measure the "distance" (delay, ...) to neighbouring IS
3. organize the local link state information in a packet
4. distribute the information to all IS
5. calculate the route based on the information of all IS

Use

- introduced into the ARPANET in 1979, nowadays most prevalent
- IS-IS (Intermediate System-Intermediate System)
 - developed by DECNET
 - also used as ISO CLNP in NSFNET
 - Novell Netware developed its own variation from this (NLSP)
- OSPF (Open Shortest Path First)
 - since 1990 Internet RFC 1247

Link State Routing

(2)


1. Phase: gather information about the adjacent intermediate systems

• initialization procedure:

- new IS:
 - sends a HELLO message over each L2 channel
- adjacent IS:
 - responds with its own address, unique within the network

Example:

• with LAN (as virtual IS)

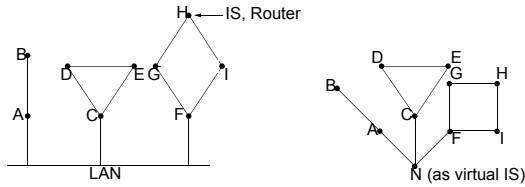


Link State Routing

(3)

2. Phase: define the "distance"

- distance is generally defined as delay
- detection via transmission of ECHO messages, which are reflected at receiver
- multiple transmission:
 - improved average value
 - with or without payload:
 - with payload is usually better,
 - but "with load" may lead to an "oscillation" of the load:

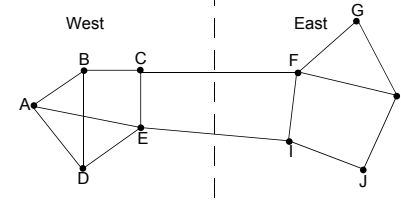


- after each new routing table the other link CF or EI is charged

Link State Routing

(4)

3. Phase: organizing the information as link state packet

• including own address, sequence number, age, "distance"



Link State Packets:

A	B	C	D	E	F
Seq.	Seq.	Seq.	Seq.	Seq.	Seq.
Age	Age	Age	Age	Age	Age
B 4	A 4	B 2	C 3	A 5	B 6
E 5	C 2	D 3	F 7	C 1	D 7
	F 6	E 1		F 8	E 8

• timing problems: validity and time of sending

- periodically
- in case of major changes

Link State Routing

(5)

4. Distributing the local information to all IS

- by applying the flooding procedure (very robust)
 - therefore sequence number in packets
- problem: inconsistency
 - varying states simultaneously available in the network
 - indicate and limit the age of packet, i.e., IS removes packets that are too old

5. Computing new routes

- each IS for itself
- possibly larger amount of data available

4.8 Multipath Routing

Principle:

- using alternative routes between the IS pairs
- usage frequency depends on the quality of the alternative
- higher throughput due to the data traffic being distributed to various paths
- increased reliability

Implementation:

- each IS contains a rating table including
 - one row for each possible destination IS

Z	A ₁	G ₁	A ₂	G ₂	...	A _n	G _n
---	----------------	----------------	----------------	----------------	-----	----------------	----------------

Z ... destination
 A_i ... i-best outgoing line
 G_i ... weight for A_i

G_i determines the probability with which A_i will be used:


$$\left(\sum_{i=1}^n G_i = 1 \right)$$

Multipath Routing

(2)

Example:

Table from J →



dest.		1st choice		2nd choice		3rd choice
A	A	0.63	I	0.21	H	0.16
B	A	0.46	H	0.31	I	0.23
C	A	0.34	I	0.33	H	0.33
D	H	0.50	A	0.25	I	0.25
E	A	0.40	I	0.40	H	0.20
F	A	0.34	H	0.33	I	0.33
G	H	0.46	A	0.31	K	0.23
H	H	0.63	K	0.21	A	0.16
I	I	0.65	A	0.22	H	0.13
K	K	0.67	H	0.22	A	0.11

Selecting the alternatives: i.e., generating a random number z (0 ≤ z < 1)

$$A_1: 0 \leq z < G_1$$

$$A_2: G_1 \leq z < G_1 + G_2$$

$$\dots$$

$$A_n: G_1 + G_2 + \dots + G_{n-1} \leq z < 1$$

Example: destination B




4.9 Hierarchical Routing

Motivation

- a large number of IS means
 - time-consuming dynamic routing calculation
 - storage of very large routing tables

⇒ hierarchical structure

- reduces individually treated IS



Example (of 2 tables)

Comparison

- but
 - the best path is not always calculated
- design:
 - number of layers

Hierarchical table for 1A


Dest.	Line	Hops
1A	-	-
1B	1B	1
1C	1C	1
2	1B	2
3	1C	2
4	1C	3
5	1C	4

Full table for 1A

Dest.	Line	Hops
1A	-	-
1B	1B	1
1C	1C	1
2A	1B	2
2B	1B	3
2C	1B	3
2D	1B	4
3A	1C	3
3B	1C	2
4A	1C	3
4B	1C	4
4C	1C	4
5A	1C	4
5B	1C	5
5C	1B	5
5D	1C	6
5E	1C	5

4.10 Routing with Mobility

Principle

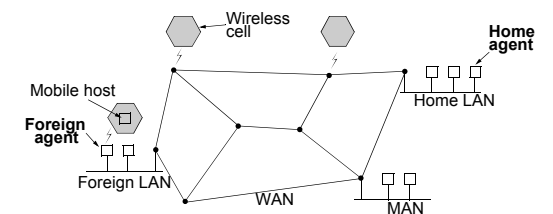

- end system identified by its local home address
- no modifications in existing IS
- i.e.,
 - Home-Agent: stationary address
 - Foreign Agent: knows mobile end system

IBR (Institut für Betriebssysteme und Rechnerverbund) – TU Braunschweig
Kommunikationssysteme: Network Layer

Routing with Mobility (2)

Tunneling and Rerouting Procedures

The diagram shows a Source node on the left and a Home Agent node on the right, connected by a curved line representing a tunnel. A Foreign Agent node is located below the Source. The process is described in four steps:

1. Packet is sent to the mobile host's home address
2. Packet is tunneled to the foreign agent
3. Sender is given foreign agent's address
4. Subsequent packets are tunneled to the foreign agent

09-13_e.fm 69 3.Dezember.02

IBR (Institut für Betriebssysteme und Rechnerverbund) – TU Braunschweig
Kommunikationssysteme: Network Layer

5. Broadcast Routing

Terminology

- **Unicast:** 1 : 1 communication
- **Multicast:** 1 : n communication
- **Broadcast:** 1 : all communication

The diagrams show a sender node connected to a subnetwork. In unicast, a single path leads to one receiver. In multicast, multiple paths lead to multiple receivers. In broadcast, a single path leads to all receivers in the subnetwork.

09-13_e.fm 70 3.Dezember.02

IBR (Institut für Betriebssysteme und Rechnerverbund) – TU Braunschweig
Kommunikationssysteme: Network Layer

5.1 Broadcast Routing: Methods

Several methods have been proposed for broadcasting

Simple approaches:

1. **Individual sending to every destination (distinct packets)**
 - requires no special feature from the network
 - waste of bandwidth
 - sender has to know all destinations
2. **Flooding**
 - too many duplicates

09-13_e.fm 71 3.Dezember.02

IBR (Institut für Betriebssysteme und Rechnerverbund) – TU Braunschweig
Kommunikationssysteme: Network Layer

5.2 Broadcast Routing: Multidestination Routing

Each Packet **CONTAINS A LIST OF DESTINATIONS**

Steps performed at each IS

- examine which outgoing links are required
- generates a packet copy for each **REQUIRED** outgoing link
 - packet copy contains **ONLY** destinations which can be reached via this line

Example:

- network with I_0 as the considered IS

The network diagram shows a central node I_0 connected to nodes A, B, and C. Node A is further connected to nodes I1, I2, I3, and I4. Node B is connected to I2, and node C is connected to I5. A host H is connected to I0. A packet with destinations I_0, I_1, I_2, I_3, I_4 enters the network at node D.

The routing table for node I_0 is shown below:

I1	A	~
I2	B	~
I3	A	~
I4	A	~

The diagram shows the packet being distributed to Host A (with destinations I1, I3, I4), Host B (with destination I2), and Host C.

09-13_e.fm 72 3.Dezember.02


5.3 Broadcast Routing: Spanning Tree

Idea:

- use sink tree for router initiating broadcast or other spanning tree
 - subset of subnet including all routers with no loops

Spanning tree: subset of subnet including all routers with no loops

Example network, IS "I" as the sender

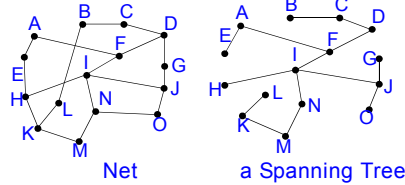

Prerequisite:

- Spanning Tree is known to the IS

- IS generates minimum number of packet copies
- IS generates a packet copy for each required outgoing line
 - all spanning tree lines except incoming one

Main issue:

- how to determine a Spanning Tree?
 - sometimes available, e.g., from link state routing
 - sometimes not, e.g., with distance vector

5.4 Broadcast Routing: Reverse Path Forwarding (RPF)

Also called "Reverse Path Flooding" (RPF)

- Variation of the Spanning Tree

Principle

- each sender has his own Spanning Tree
- but IS do not need to know the Spanning Trees

Considerations

- each router has information which path it would use for (unicast)-packets
 - because of the unicast routing algorithms

Algorithm (for a packet arriving at an IS)

- has this packet arrived at THE IS entry over which the packets for this station/source are usually also sent?

Yes:


- packet used the BEST route until now,
- action: resend over all edges (not including the incoming one)

No:

- action: discard packet (most likely duplicate)

Broadcast Routing: Reverse Path Forwarding (RPF) (2)

Example

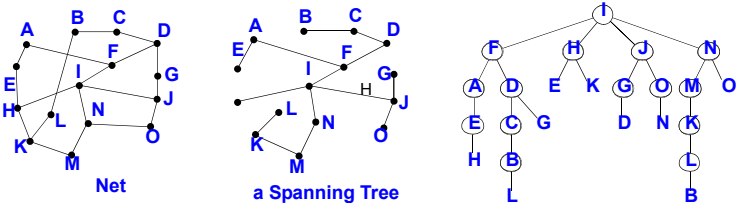

Characteristics


- based on the assumption of SYMMETRIC DUPLEX CHANNELS
- simple implementation (no global conditions, ...)
- metrics
 - consist only of distance

Application:

- MBone Multicast Backbone**
 - between MBone islands

Broadcast Routing: Reverse Path Forwarding (RPF) (3)

Example:

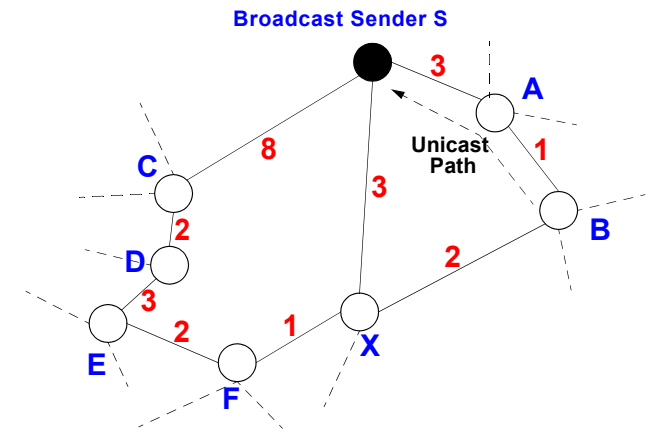


in the example

- B will send its unicast packets to S via A (shortest route).

Broadcast Routing: Reverse Path Forwarding (RPF) (4)

Example:

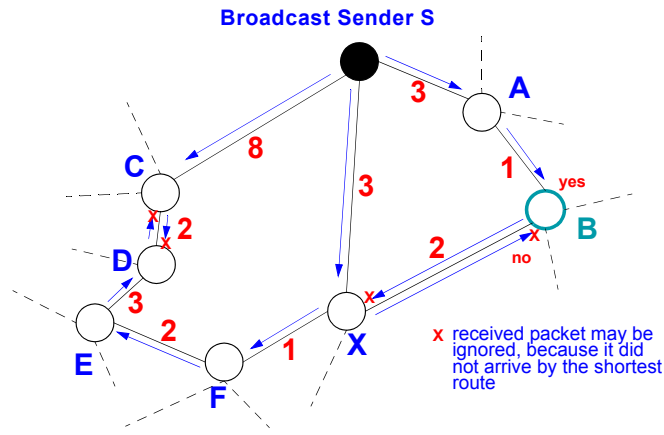

- within the RPF algorithm of the above example
 - router B uses the unicast routing information to ignore all broadcast packets received from S, WHICH DID NOT ARRIVE VIA NODE A

5.5 Broadcast Routing: Reverse Path Broadcast (RPB)

Motivation: disadvantages of Reverse Path Forwarding:

- when packets are forwarded, they are forwarded over ALL edges (not including the incoming one)
- better if over only one SUITABLE edge

Algorithm: packet from S(ource) to D(estination)

- like REVERSE PATH FORWARDING
 - with specific selection of the outgoing links
- has this packet arrived via an IS entry over which packets may also be sent to station/source S?

Yes:


- packet used the BEST route until now,
- THEN: select the edge at which the packets arrived and from which they are then rerouted to source S (in reversed direction)
- THEN DO NOT i.e. not as in Reverse Path Forwarding (RPF) send over all edges (without the incoming one)

No:

- discard packet (is most likely a duplicate)

Broadcast Routing: Reverse Path Broadcast (RPB) (2)

Example:

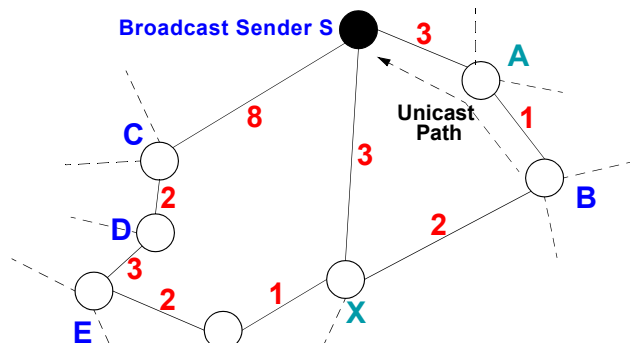


In the example

- A can learn by inspecting the unicast packets
 - that it is located on the unicast path from B to S
 - X can learn by packets failing to appear
 - that it is not located on the unicast path from B to S
- ⇒ This information is used by the RPB algorithm

Broadcast Routing: Reverse Path Broadcast (RPB) (3)

Example:

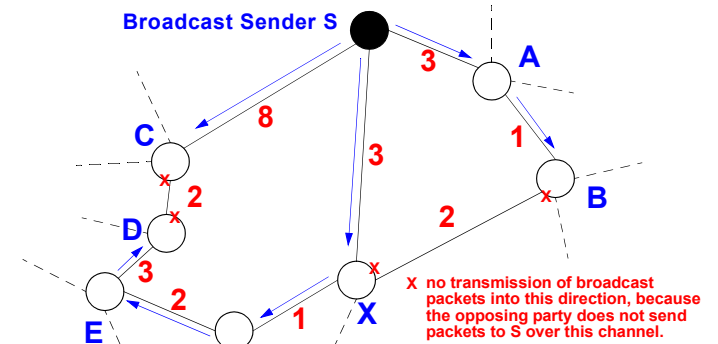

In the example with the RPB algorithm

- X does not forward a broadcast packet from S to B, because X knows
 - that B does not receive unicast packets via X
 - but sends them over a different node instead with
 - this other node then receiving the broadcast packet
- ⇒ Connection X-B relieved in comparison to the RPF algorithm

Broadcast Routing: Reverse Path Broadcast (RPB) (4)


Comment:

- when distance is the same:
 - IS with the shortest address is selected
- IS utilize the routing information,
 - to exploit this parent-child relationship

(BELOW ANOTHER EXPLANATION)

Principle

- as in **REVERSE PATH FORWARDING** i.e., only packets which arrived over the "best" path are forwarded, but...
 - collision avoidance (additional discarding of packets) by defining a **PARENT-CHILD RELATIONSHIP**
 - provided that knowledge of the Spanning Tree exists
- or **parent-child relationship:**
 - IS B is the parent of the adjacent IS X, IF its distance to source Z is shorter than the distances of all other neighbours of X
 - (in the example: B is parent of X)




Broadcast Routing: Reverse Path Broadcast (RPB) (5)

Algorithm for selecting the outgoing links

- X is the **PARENT** of a link,
 - IF its distance to the source is shorter than Y's distance (or than all other ones)
- if distance is the same:
 - decision is based on the shorter address
- router exchange routing information with each other to determine parent-child relationship

Example

- link a is the child of X, not of Y
- **PACKETS FORWARDED ONLY OVER CHILD LINKS** (this results in the Spanning Tree)



6. Multicast Routing

Multicast Definition

- Unicast: 1:1 communication
- Multicast: 1:n communication

Tasks


- to send data to a group of end systems
 - one-time sending instead of multiple sending
- to maintain the overall load at a low level

Results


- lower network load
- lower load on the sender

Condition: group addressing

- group membership may change, managed for example by:
 - Internet Group Management Protocol (IGMP)
 - group management (create, destroy, join, leave)
 - somehow related protocols for session maintenance
 - Session Description Protocol (SDP)
 - Session Announcement Protocol (SAP)
 - Session Initiation Protocol (SIP)



6.1 Multicast Routing: Spanning Tree

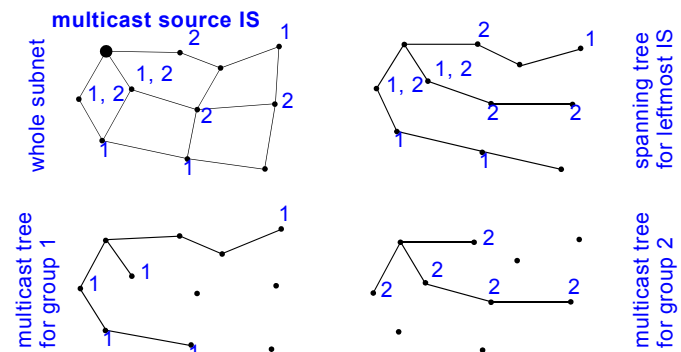

Principle

- global knowledge of the multicast group's spanning tree (Multicast Tree),
- initially only local knowledge

Distribution of Information

- first IS adapts spanning tree to the specific group i.e. aligning (propagating) the spanning tree by
 - distance vector routing or link state routing

Multicast Routing: Spanning Tree with Link State Routing

Principle: all IS must know the multicast tree

- i.e. each IS
 - KNOWS TO WHICH GROUP IT BELONGS
 - but DOES NOT know (initially) which other IS belong to the group as well
- distribution of this information
 - depends on the underlying routing protocol
 - here: Link State Routing

Link State Routing

- all IS send link state packets periodically
 - containing information
 - distance to neighbours
 - EXPANDED by information on multicast groups
 - by broadcast to all the others
- each IS calculates a multicast tree
 - from the now locally available and complete state information
- based on the information about the multicast tree
 - IS determines the outgoing lines
 - on which packets have to be transmitted

Multicast Routing: Spanning Tree with Distance Vector R.

Principle: all IS have to know the multicast tree

- i.e. each IS
 - KNOWS WHICH GROUP IT BELONGS TO
 - but DOES NOT know (initially) which other IS also belong to the group
- distribution of this information
 - depends on the underlying routing protocol
 - here: Distance Vector Multicast Routing Protocol DVMRP

Method: REVERSE PATH FORWARDING WITH PRUNING

- (Pruning: feedback in order to stop data transfer)

Multicast Routing: Spanning Tree with Distance Vector R.(2)


Principle

- sender sends first multicast packet to everybody, using the broadcast method Reverse Path Forwarding RPF
- then apply adaptation (PRUNING)
 - because broadcasting too resource consuming
- from broadcast communication to the multicast structure
- originating from the leaves of the spanning tree:
 - if multicast packet arrives from IS leaf NOT belonging to multicast group:
 - send a NON-MEMBERSHIP-REPORT (NMR) to the immediate predecessor
 - propagate a Non-Membership-Report NMR, if
 1. IS receives Non-Membership-Reports NMRs from all descendents
 2. but does not belong to the group itself
 - if multicast packet arrives from IS leaf DOES BELONG TO multicast group:
 - nothing happens on the IS side (i.e., the following multicast packets are also send there again)

Benefit:

- pruning only on trees that are actually used
 - unused trees are cut coarsely
- optimized for many receivers

6.2 Multicast Routing: Core-Based Tree

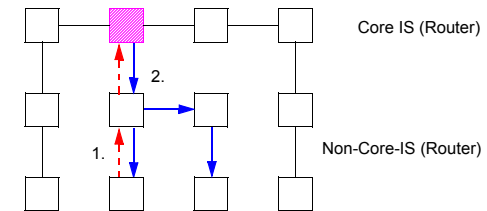

- also know as "Trees with Rendezvous Points"

Principle

- the CORE is selected (an IS which is central to the group)
- the group's spanning tree from this node/IS is determined
- the sender transmits a packet to this central IS
- the core transmits this packet via the spanning tree

Properties

- + simple central calculation
- + one tree common to all n senders (instead of n trees)
- route to the central IS may not be optimized

6.3 Multicast Routing: Additional Procedures & Topics

Variants (some additional ones)

- **Truncated Reverse Path Forwarding (TRPB)**
 - enhancement of broadcast procedure "Reverse-Path-Broadcast"
- **Steiner Trees (optimizing network resources)**
- **Reverse Path Multicast (RPM)**
- **Distance Vector Multicast Routing Protocol (DVMRP)**
 first version of DVMRP (RFC 1075) based on RPM
- **hierarchical DVMRP**
 - two-tiered, non-overlapping domains/subnetworks
- **Multicast Open Shortest Path First (MOSPF)**
 - based on link state routing OSPF
- **Protocol Independent Multicast (PIM)**
 - for groups with small spatial density

Multicast Routing: Additional Procedures & Topics (2)

Objectives: optimizations / constraints

- **edge optimization:** e.g., path with largest bandwidth
- **edge limited:** e.g., find a path that adheres to the constraints at every edge
- **path optimization:** e.g., path with the lowest overall costs
- **path limited:** e.g., path which does not exceed certain overall delay

Reserving resources

- **Resource Reservation Protocol (RSVP)**
- **Stream Protocol Version 2 (ST-2)**

Quality of Service

- **negotiation**
- **with heterogenous receivers (filtering)**
- **adaptation (scaling)**

7. Congestion Control

When too much traffic is offered:

- **congestion sets in**
- **performance degrades sharply**


Reasons for congestion, among others

- **IS too slow for routing algorithms**
- **incoming traffic overloads outgoing lines**

Congestions tend to amplify themselves

Example: IS drops packet due to congestion

- **packet has to be retransmitted**
 - additional bandwidth used
- **sender cannot release the buffer**
 - thereby additionally tying up resources

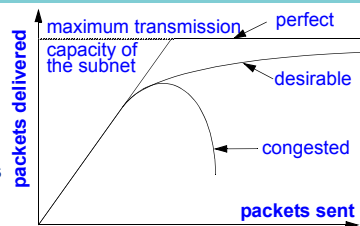

congestion control	vs.	flow control
managed by subnet (L3)		concatenated point-to-point (L2)
global issue		more an end-to-end issue
if possible, avoid from the beginning		reduce effects
may use flow control		

Congestion Control (2)

General methods of resolution

- **increase capacity**
- **decrease traffic**

Taxonomy according to Yang/Reedy 1995

- **open loop: avoid (before congestion happens)**
 - initiate countermeasures at the sender
 - initiate countermeasures at the receiver
- **closed loop: repair**
 - explicit feedback (packets are sent from the point of congestion)
 - implicit feedback (source assumes that congestion occurred due to other effects)

Strategies

1. **avoidance**
 - traffic shaping, leaky bucket, token bucket, reservation (multicast), isarithmic congestion control
 - flow control (not discussed herein)
2. **repair**
 - drop packets, choke packets, hop-by-hop choke packets, fair queuing,...

7.1 Congestion Avoidance

Principle

- appropriate communication system behavior and design

Policies at various layers can affect congestion

Data link layer

- flow control
- acknowledgements
- error treatment / retransmission / FEC


Network layer

- datagram (more complex) vs. virtual circuit (more procedures available)
- packet queueing and scheduling in IS
- packet dropping in IS (including packet lifetime)
- selected route

Transport layer

- basically the same as for the data link layer
- but some issues are harder (determining timeout interval)

Avoidance by Traffic Shaping

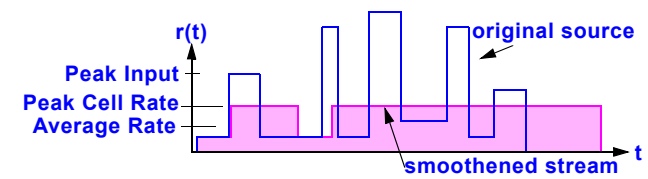

Motivation

- congestion is often caused by bursts
- bursts are relieved by smoothing the traffic (at the cost of a delay)

Procedure

- negotiate the traffic contract beforehand (e.g., flow specification)
- the traffic is shaped by the end device
 - average rate and
 - burstiness


Application: virtual circuits in ATM

- "traffic shaper" smoothens extremely fluctuating traffic
- trade-off: loss of cells vs. delay

Traffic Shaping with Leaky Bucket


Principle

- continuous outflow
- congestion corresponds to data loss
- 1986: Turner

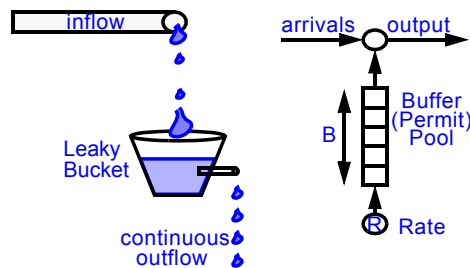

Implementation

- easy if packet length stays constant (like ATM cells)
- example

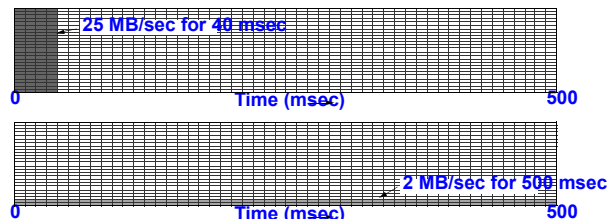

Traffic Shaping with Token Bucket

Principle


- permit a certain amount of data to flow off for a certain amount of time
- controlled by "tokens"
- number of tokens limited

Implementation

- add tokens periodically (until maximum has been reached)
- remove token: depending on the length of the packet (byte counter)

Comparison


- **Leaky Bucket**
 - max. constant rate (at any point in time)
- **Token Bucket:**
 - permits a limited burst

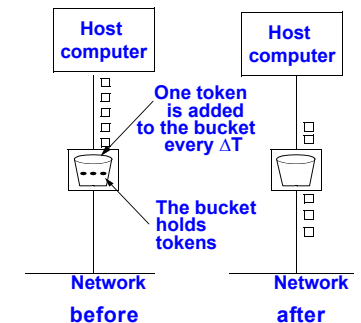


Avoidance by Reservation: Admission Control

- Principle:**
- prerequisite: virtual circuits
 - reserving the necessary resources (incl. buffers) during connect
 - if buffer or other resources not available
 - alternative path
 - desired connection refused

- Example:**
- network layer may adjust routing based on congestion
 - when the actual connect occurs

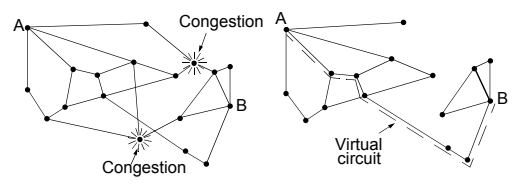

Avoidance by Buffer Reservation

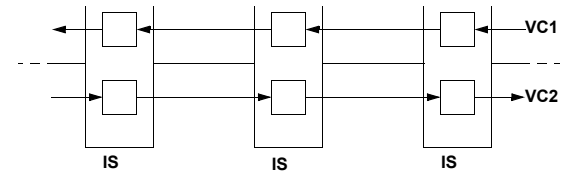


- Principle:**
- buffer reservation
- Implementation variant: Stop-and-Wait protocol**
- one buffer per IS and connection (simplex, VC=virtual circuit)
- Implementation variant: Sliding Window protocol**
- m buffer per IS and (simplex-) connection (m corresp. to the window size)
- Properties:**
- congestion not possible
 - buffers remain reserved, even if there is no data transmission for some periods
 - therefore, usually only for applications that require low delay and high bandwidth (e.g., digital voice transmission)

Avoidance by Reservation: Multicast and Time Guarantees

- Reservation protocols**
- Resource Reservation Protocol (RSVP)
 - Stream Type Protocol Version 2 (ST-2)

Searching for the most ideal IS to connect to an MC group

Example

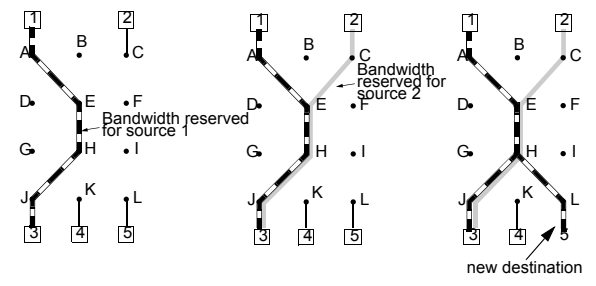

Avoidance by Isarithmic Congestion Control

- Principle**
- limiting the number of packets in the network by assigning "permits"
 - amount of "permits" in the network
 - a "permit" is required for sending
 - when sending: "permit" is destroyed
 - when receiving: "permit" is generated

- Problems**
- parts of the network may be overloaded
 - equal distribution of the "permits" is difficult
 - additional bandwidth for the transfer of "permits" necessary
 - bad for transmitting large data amounts (e.g. file transfer)
 - loss of "permits" hard to detect

7.2 Congestion Correction

Principle

- **no resource reservation**
- **necessary steps**
 - detect congestion
 - introduce appropriate procedures for reduction

Packet dropping

Principle:

- **incoming packet is dropped, if it cannot be buffered**


Preconditions for

- **datagram:**
 - no preparations necessary
- **connection-oriented service:**
 - packet will be buffered until receipt has been acknowledged

Buffer assignment methods

1. Permanent buffers per incoming line

- **ACK**
 - would have to be discarded
 - during overwrite, ACK would release buffer
 - (comment: in the above picture the ACK refers to the 5 buffer slots on the right)




Packet dropping

(2)

2. Maximum number of buffers per output line

• example:



- packet dropped despite there are free lines
- **heuristic rule [Irland]**

$$m = \frac{k}{\sqrt{s}}$$

- m ... max. number of buffers per output line
- k ... total number of buffers
- s ... number of output lines

3. Minimal number of buffers per output line

- **line cannot be starved**

Example ARPANET

- **a combination of 2) and 3)**

Packet dropping

(3)

4. Content-related dropping: relevance

• reference

- data connection as a whole (or all single data packets from one end system to another end system)
- single packets, examples
 - WWW document
images vs. text and structural information
 - file transfer:
old packets more important than new ones
(algorithm to initiate correction process should start as late as possible)

• implementation of priorities

- in virtual circuits or datagrams
- example: ATM

Packet dropping (4)

Properties:

- very simple
- but
- retransmitted packets waste bandwidth:
- packet has to be sent $1 / (1 - p)$ times before it is accepted
 - (p ... probability that packet will be dropped)

Optimization necessary to reduce the wastage of bandwidth

- dropping packets that have not gotten that far yet

Choke Packets

Principle:

- reduce traffic during congestion by telling source to slow down
- Procedure for IS: each outgoing line (OL) has one variable = utilization
- calculating u ($0 \leq u \leq 1$) (u: UTILIZATION)
 - IS checks the line usage f periodically ($f = 0$ or 1)
 - $u = a * u + (1 - a) * f$
 - $0 \leq a \leq 1$ determines to what extent "history" is taken into account
- $u > \text{threshold}$: OL changes to condition "warning"
 - send **CHOKE PACKET** to source (indicating destination)
 - tag packet (to avoid further choke packets from down stream IS) and forward it

Procedure for source

- source receives the choke packet
 - reduces the data traffic to the destination in question by $X_1\%$
- source recognizes 2 phases: (gate time so that the algorithm can take effect)

Ignore	Listen
--------	--------

 - Ignore: ES ignores further Choke packets
 - Listen: ES listens if more Choke packets are arriving
 - yes: further reduction by $X_2\%$; go to Ignore phase
 - no: increase the data traffic

Choke Packets (2)

Enhancements

- varying choke packets depending on state of congestion
 - warning
 - acute warning
- for u instead of utilization
 - queue length
 -

Properties


- effective procedure
- but
 - possibly many choke packets in the network
 - even if Choke bits may be included in the data at the senders to minimize reflux
 - end systems can (but do not have to) adjust the traffic
 - superimposed by mechanisms
 - L2 flow control, ...
 - L4 TCP, ..

Choke Packets: Hop-by-Hop Choke Packets (3)

Principle

- reaction to Choke packets already at IS (not only at ES)

Example

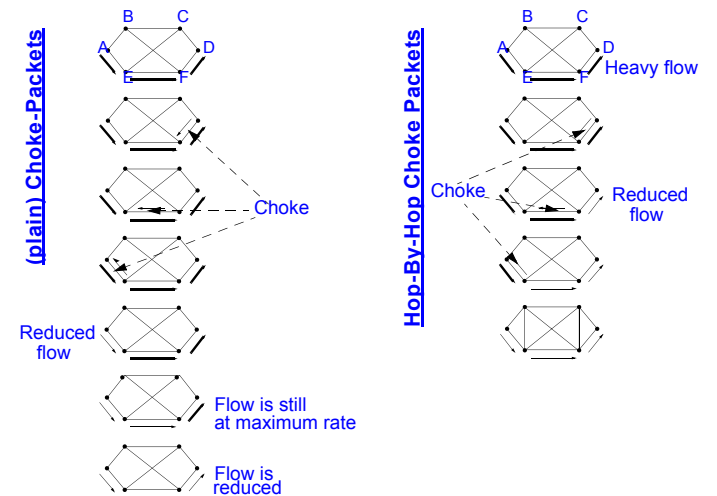

Random Early Detection (RED)

Idea:

- Congestion should be attacked as early as possible
- some transport protocols (e.g., TCP) react to lost packets by rate reduction

IS drops some packet before congestion significant (i.e., early)

- gives time to react

Dropping starts when moving avg. of queue length exceeds threshold

- small bursts pass through unharmed
- only affects sustained overloads
- Packet drop probability is a function of mean queue length
 - prevents severe reaction to mild overload

Can mark packets instead of dropping them

- allows sources to detect network state without losses

RED improves performance of a network of cooperating TCP sources

No bias against bursty sources

Controls queue length regardless of endpoint cooperation

8. Addressing

3 types of identifiers: names, addresses and routes [Shoch 78]

"The **NAME** of a resource indicates **WHAT** we seek,
an **ADDRESS** indicates **WHERE** it is, and
a **ROUTE** says **HOW TO GET THERE**."

Objectives:


- global addressing concept for ES
- simplified address allocation
- addresses independent from
 - type and topology of the subnetworks
 - number and type of the subnetworks to which the ES have been connected
 - location of a source ES

8.1 X.121 Addressing

CCITT/ITU "numbering scheme"

- addressing concept for public data networks
- a.o., used by X.25

X.121 address:



- a maximum of 14 digits

• consisting of

- Data Network Identification Code (4 digits)
 - Data Country Code (digits 1 - 3)
 - Network Identification (digit 4)
- Network Terminal Number (max. 10 digits)

Example:

DCC for USA: 310 - 329, i. e. max. 200 networks

DCC for Tonga: 539, i. e. max. 10 networks

8.2 OSI Addressing

Objective:

- global addressing concept for both existing and new subnetworks

Situation: different concepts exist for

• public networks:

- X.121: data networks
- F.69: telex
- E.163: telephone network
- E.164: ISDN, ...

• private networks

⇒ i.e., a flexible and expandable concept is necessary

OSI method: unique NSAP identification


OSI method: hierarchic addresses

- OSI defines the **ADDRESSING DOMAINS**
- the domain contains the **ADDRESSING AUTHORITY**
- Addressing Authority
 - allocates addresses
 - creates new domains and delegates authority

OSI Addressing

(2)

graphic representation of the domain hierarchy:

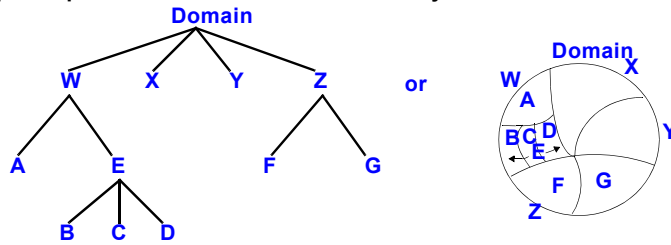

A domain may be


- networks of one type
- networks of a geographical region
- networks of an organisation
- ...

OSI Addressing: Structure

(3)

Address length: 20 bytes (binary) or 40 digits

Address structure:



• Initial Domain Part (IDP) with

- **AUTHORITY AND FORMAT IDENTIFIER (AFI)**
 - specifies how to interpret the IDI (syntax and semantics)
 - e.g. the format of the DSP (binary or digits)

IDI Format	DSP SYNTAX	
	Decimal	Binary
X.121	36	37
ISO DCC	38	39
F.69	40	41


Character	National Character
50	51

- **INITIAL DOMAIN PART (IDI)**
 - identifies the Addressing Authority (AA), responsible for **ALLOCATING THE NSAP ADDRESSES**
 - identifies the domain
- **Domain Specific Part (DSP)**
 - contains the address clearly identifying the ES within the domain

8.3 Internet Addresses (IP)

Global addressing concept for ES (and IS) in the Internet

- 32 bit address (amount is limited!)
- each address is unique worldwide
- structure: Net-ID (Subnet-ID), ES-ID

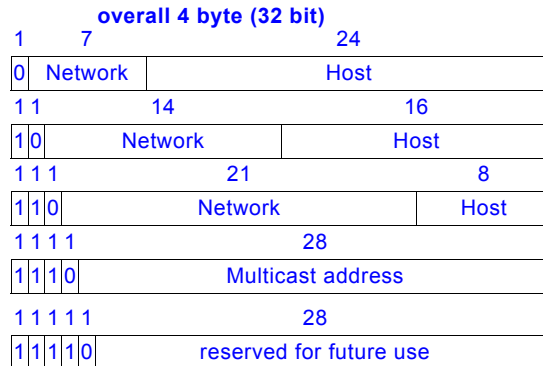

Internet Addresses (IP)

(2)

Notation

- decimal value for each byte (0...255)
- subdivided by dots
- value range: 0.0.0.0 ... 255.255.255.255

Formats: 5 classes


- A:** 1.0.0.0 up to 127.255.255.255
- B:** 128.0.0.0 up to 191.255.255.255
- C:** 192.0.0.0 up to 223.255.255.255
- D:** 224.0.0.0 up to 239.255.255.255 (Multicast)
- E:** 240.0.0.0 up to 247.255.255.255

Broadcast addresses: (convention: 11...1 for Host-ID)


Internet Addresses (IP) (3)

- Address allocation**
- **class allocation and network range:**
 - by a central authority
 - Network Information Center NIC
 - **end system**
 - local
 - possibly forming a subnetwork

- Example**
- **network**

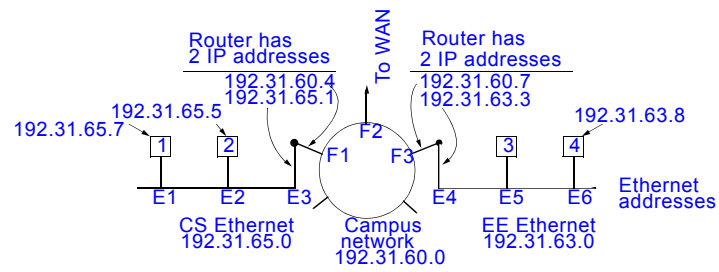

Internet Addresses (IP): A Critical Review (4)

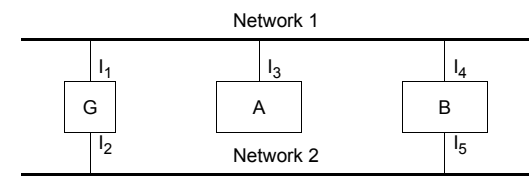

- Addresses IDENTIFY "NETWORK CONNECTIONS", not the ES**
- "multi-homed" ES have more than one address
 - a change of the connection forces the modification of the address
 - the address has an impact on the chosen route (constitutes a problem in the mobile area)

Example: A cannot reach B via address I₅ if G fails

- **comment: is also valid for X.121**

- Amount of addresses**
- **limited**

Internet Addresses (IP): The Future (5)

- IP Version 6 (IPv6)**
- 16 byte length (instead of 4 byte length, i.e. approx. 3×10^{38})

- Distribution**
- **provider-based:** approx. 16 mio. companies distribute addresses
 - **geographic-based:** distribution as it is today
 - **link, site-used:** address relevant only locally (security, Firewall concept)

- e.g. new: Anycast**
- **sending data to an individual of a group**
 - **e.g. the one who is geographically the closest**

Internet Addresses (IP): The Future (6)

Prefix (binary)	Usage	Fraction
0000 0000	Reserved (including IPv4)	1/256
0000 0001	Unassigned	1/256
0000 001	OSI NSAP addresses	1/128
0000 010	Novell Netware IPX addresses	1/128
0000 011	Unassigned	1/128
0000 1	Unassigned	1/32
0001	Unassigned	1/16
001	Unassigned	1/8
010	Provider-based addresses	1/8
011	Unassigned	1/8
100	Geographic-based addresses	1/8
101	Unassigned	1/8
110	Unassigned	1/8
1110	Unassigned	1/16
1111 0	Unassigned	1/32
1111 10	Unassigned	1/64
1111 110	Unassigned	1/128
1111 1100	Unassigned	1/512
1111 111010	Link local use addresses	1/1024
1111 111011	Site local use addresses	1/1024
1111 1111	Multicast	1/256